

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
23 December 2004 (23.12.2004)

PCT

(10) International Publication Number  
**WO 2004/110800 A1**

(51) International Patent Classification<sup>7</sup>: **B60J 5/04**,  
B60R 1/06

Giovanni [IT/IT]; Via Ippolito Nievo, 8, I-56017 San  
Giuliano Terme (IT).

(21) International Application Number:  
PCT/EP2004/051135

(74) Agents: **JORIO**, Paolo et al.; Studio Torta S.r.l., Via  
Viotti, 9, I-10121 Torino (IT).

(22) International Filing Date: 16 June 2004 (16.06.2004)

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
TO 2003A 000455 17 June 2003 (17.06.2003) IT

(71) Applicant (*for all designated States except US*): **INTIER  
AUTOMOTIVE CLOSURES S.P.A.** [IT/IT]; Corso Alla-  
mano, 70/5, I-10090 Cascine Vica - Rivoli (IT).


(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **OTTINO**, Franco,


(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: A DOOR FOR A MOTOR VEHICLE

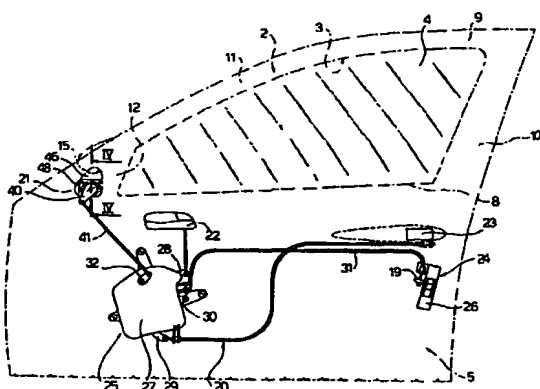

(57) Abstract: Described herein is a door (1) for a motor vehicle provided with a supporting framework (2), supporting means (16) for supporting an external rear-view mirror (17), a lock (20), and a key assembly (21), which is operatively connected to the lock (20) and can be selectively actuated via a control key for disabling/enabling opening of said lock (20) from the outside of the motor vehicle. The key assembly (21) is rigidly fixed to the framework (2), and is covered, towards the outer side of the door (1), by the means (16) for supporting the rear-view mirror (17) and is accessible from the outside through a seat (43) made in the supporting means (16) themselves.

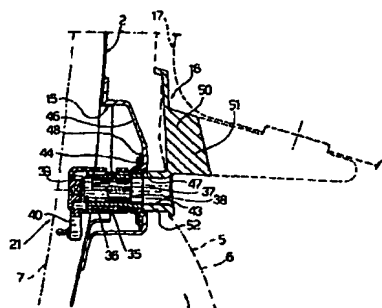



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

**(48) Date of publication of this corrected version:**

12 May 2005

**(15) Information about Correction:**

see PCT Gazette No. 19/2005 of 12 May 2005, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*